



USERS/INSTALLATION MANUAL

WhisperPower Power Module Genverter WP-PMG 15 Frame 3



Inverter for M-GV 15



CONTENTS

1. Introduction
2. Instructions for use
3. Troubleshooting
4. Installation
5. Specifications
6. Warranty terms and conditions
7. Declaration of Conformity

1. INTRODUCTION

Thanks for choosing our product. The Power Module for Genverter (WP-PMG) is an essential link between your WhisperPower gen- verter and your AC electrical system. WhisperPower inverters are state-of-the-art systems using very compact and highly efficient Permanent Magnet alternators to produce electric power. Unlike traditional fixed speed generator sets, however, inverters may produce output voltages up to 350 VAC with frequencies as high as 400 Hz. This is where the WP-PMG comes into play, using advanced power electronics to produce a stable sinusoidal AC voltage at 50 Hz, as required by regular 230 V appliances. Safety is enhanced by the low output impedance of the WP-PMG allowing proper circuit protection.

Applicability of this manual

This manual contains important instructions for safe and effective installation, operation, maintenance and, if necessary, troubleshoot- ing of the WP-PMG.

It is therefore obligatory that every person who works on or with the WP-PMG is completely familiar with the contents of this manual, and that he/she carefully follows the instructions and important safety instructions contained herein.

Use of pictograms

Throughout this manual, safety instructions and warnings are marked by pictograms.



WARNING

A WARNING refers to possible injury to the user or significant material damage to the WP-PMG if the user does not (carefully) follow the procedures.



CAUTION!

Special data, restrictions and rules with regard to preventing damage. A procedure, circumstance, etc. which deserves extra attention.

Identification label

Figure 1: Identification label

The identification label is located at the right-hand side of the WP-PMG (see figure 1). Important technical information required for service, maintenance & secondary delivery of parts can be derived from the identification label.




CAUTION!


Never remove the identification label.

Liability

WhisperPower can accept no liability for consequential damage due to use of the WP-PMG, possible errors in the manuals and their results. Copyright © 2016 WhisperPower. All rights reserved. Repro- duction, transfer, distribution or storage of part or all of the contents in this document in any form without the prior written permission of WhisperPower is prohibited.

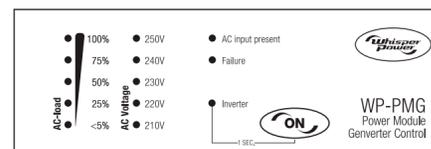

Remote Monitoring Panel

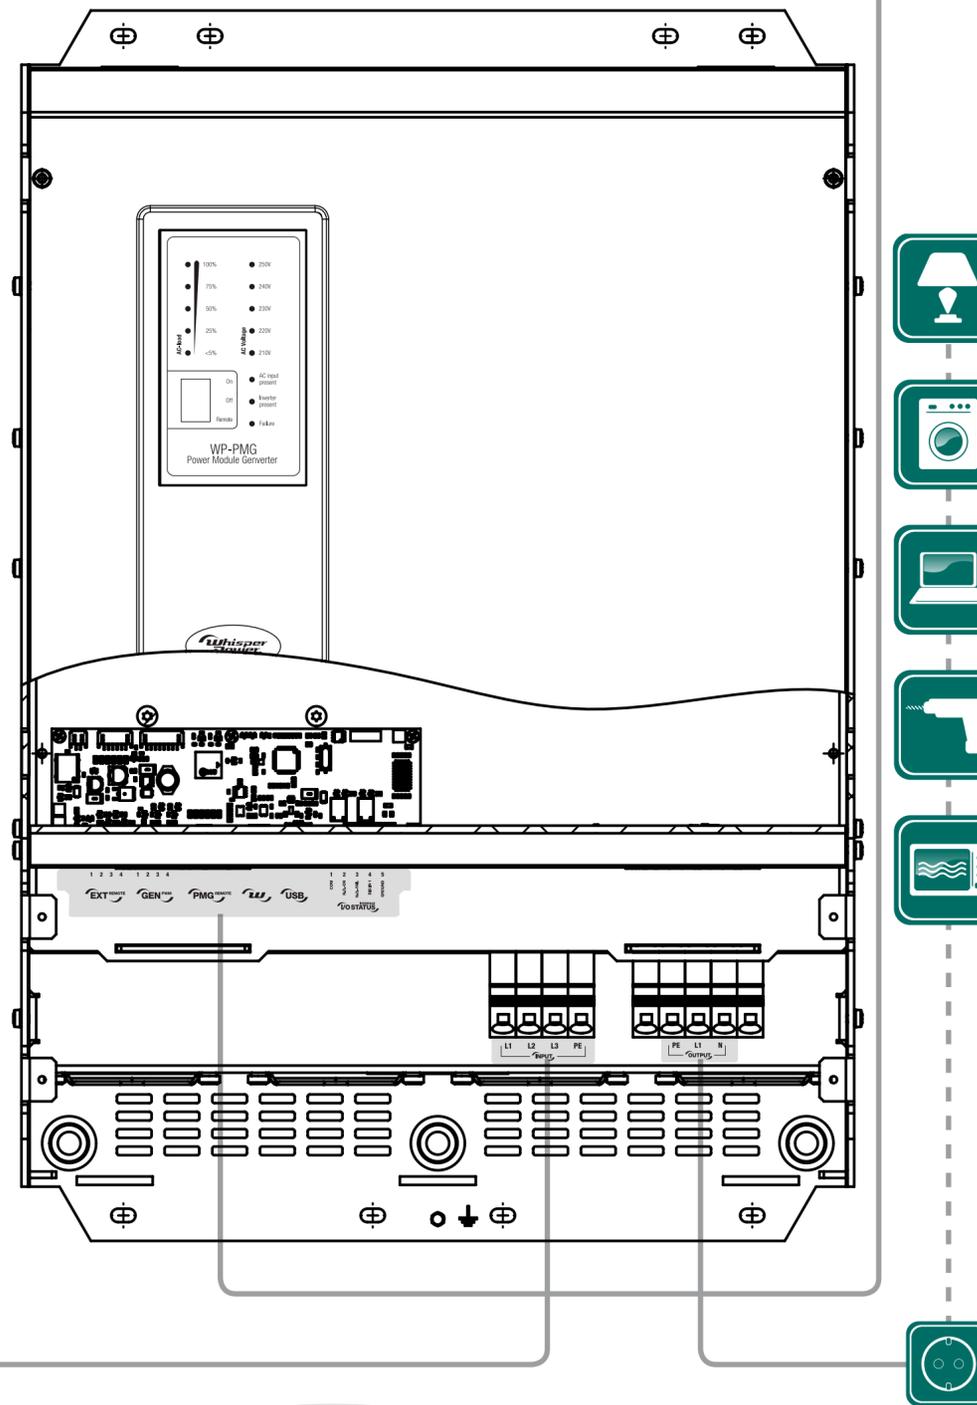

Warning regarding life support Applications

This equipment is not sold for applications in any medical equip- ment intended for use as a component of any life support system unless a specific written agreement pertaining to such intended use is executed between the manufacturer and WhisperPower. Such agreement will require the equipment manufacturer either to con- tract additional reliability testing of the WP-PMG and/or to commit to undertake such testing as a part of the manufacturing process. In addition the manufacturer must agree to indemnify and not hold WhisperPower responsible for any claims arising from the use of the WP-PMG in the life support equipment.

Guarantee specifications

WhisperPower guarantees that this equipment has been built according to the legally applicable standards and specifications. Should work take place, which is not in accordance with the guidelines, instructions and specifications contained in this user's manual, then damage may occur and/or the unit may not fulfill its specifications. All of these matters may mean that the guarantee be- comes invalid. The guarantee is limited to the costs of repair and/or replacement of the product. Costs for installation labour or shipping of the defective parts are not covered by this warranty.

2. IMPORTANT SAFETY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

- To ensure safe and sustainable operation of the WP-PMG, the handling and safety instructions detailed in this manual shall be followed at all times.
- To reduce the risk of electric shock – Do not expose WP-PMG to rain, snow, spray, moisture, excessive pollution and condensing circumstances. To reduce risk of fire hazard, do not cover or obstruct the ventilation openings.
- Do not install the WP-PMG in a non-ventilated room, overheating may result. The WP-PMG was designed for dry and clean environments.
- This product has been designed and tested in accordance with international standards. Only use the equipment for the intended purpose of application. Use of an attachment or spare part not recommended or sold by WhisperPower may result in a risk of fire, electric shock, or injury to persons.
- Bear in mind that all applicable (safety) standards and (local) regulations shall be followed at all times.
- There are no serviceable parts inside the enclosure. Incorrect reassembly may result in a risk of electric shock or fire. Only qualified and authorized installers are permitted to perform installation or maintenance activities that require opening the system.
- The WP-PMG must be provided with an equipment-grounding conductor to the AC-output ground terminal. Grounding of the Neutral conductor and connection of all other wiring must comply with international and local codes and ordinances.

Operation



CAUTION!

Before switching on the first time, the equipment must be installed properly (see next section) and correct settings must be made.

Power On/Off

The Power switch on the control panel implements main control of the WP-PMG output power. Note that it does not control the genverter. When switched to "on" or "remote", the PMG function is switched on, providing controlled output power to connected loads, while displaying assorted operating information. Under normal conditions, the unit is left switched "on", regardless of whether the genverter is running or not.

With the switch in the "remote" position, the WP-PMG is operated from a remote panel and on the unit itself.

CONTROL PANEL INFORMATION	
AC input present	The Genverter is producing power and the WP-PMG is starting up.
Inverter present	The WP-PMG has completed starting up and is supplying 230VAC to your on board appliances.
Failure (red)	The WP-PMG failed to complete the start-up sequence or was shut down during operation. Refer to the Troubleshooting section.
AC Load	A series of five LEDs showing the WP-PMG's output as a percentage* of its rated output. If all five LEDs start blinking, the WP-PMG is overloaded and may shut down at any moment.
AC Voltage	A series of five LEDs showing the WP-PMG's approximate output voltage. In a range from 210V to 250V, the 220V or 230V LED will typically light up.

3. TROUBLESHOOTING

The table below lists possible failure conditions. If the failure LED illuminates, switch off the WP-PMG, adopt the applicable solution(s) and switch the WP-PMG on again.

PROBLEM	POSSIBLE CAUSE	SOLUTION
The failure LED illuminates	Ambient temperature is too high	Move the WP-PMG to a colder position, or reduce the load
	Ventilation is blocked	Improve ventilation
	AC input is out of range	Check generator output voltage and frequency, and correct if necessary
	Too many or too heavy AC consumers	Reduce the load

4. INSTALLATION

General Remarks

Local and/or special regulations may apply depending on the type of installation involved. It is essential that each and every circuit in the electrical system is properly installed by a qualified electrician using all applicable standards.



CAUTION!

- Risk of electric shock, personal injury, explosion and/or equipment damage
- Do not work on the WP-PMG or the electrical installation while it is still connected to a power source.
- Never connect the inverter output to a 230 V connection of the public grid.
- All electrical safety/shutdown and circuit breaking systems have to be installed separate from the WP-PMG.

In Europe pleasure craft smaller than 24 m is subject to the EC Recreational Craft Directive, which refers to EN ISO 13297:2012 (Small craft - Electrical systems - Alternating current installations).

When installing a 230 V system on a vehicle, be aware that people are not used to have such systems on a vehicle. Put warning signs on wall sockets and on junction boxes. Instruct non-regular users of the vehicle. Warn maintenance personnel of garages servicing the vehicle.

Grounding

The housings of the genverter and of the WP-PMG are grounded by means of the green/yellow wires in the genverter and output cables. Making a connection between "neutral" and "ground" of the AC 230 V output could be necessary as part of a specific insulation failure protection system. This should only be done by experts when installing such a system.

For vehicles, methods of protection are subject to rules that may vary depending on the use of the vehicle and local standards. Experts in this field should be consulted.

Transfer Switching

When a connection to the public grid is required, a power source selector must be installed between the WP-PMG and the vessel's vehicle's electrical system. This so-called transfer switch is an essential safety device allowing all AC consumers to be switched off simultaneously and separating the WP-PMG output from the grid. WhisperPower recommends the installation of a WP AC Transfer System Switch. By default, this uses grid input. When it detects WP-PMG input, it automatically switches over to generator input after 10 seconds delay time. Even more advanced, a WP WhisperSwitch allows simultaneous input from the genverter and the grid. Refer to the applicable product instructions.

Location

When looking for a proper position for installing the WP-PMG, all relevant aspects have to be taken into account, in particular:

- The WP-PMG must be installed in a dry and clean place protected from strong vibrations. Do not expose the WPPMG to dust, rain, snow or liquids of any type. The input being three-phase alternating current, the WPPMG can be installed at some distance from the Genverter.
- Ensure that ventilation airflow is not obstructed in any way. Keep a free space of 200 mm around the unit.
- The unit's control panel must remain accessible.
- The WP-PMG contains components capable of producing arcs or sparks. To prevent fire or explosion do not install the unit in compartments containing batteries or flammable materials or in locations require ignition protected equipment. Moreover, gases from batteries will corrode and damage the WP-PMG.

List of Materials

The delivery includes the WP-PMG and a WhisperPower remote control panel with its 10 m RJ12 connecting cable. 5 m and 15 m cables are available on request.

Additional materials required:

- Screws / bolts (4 × Ø 6 mm, with plugs if necessary) to mount the unit to a wall.
- A sufficient number of short-circuit proof clamps.
- Cable lugs (7) for connecting the various 4 mm2 wires.
- Cable ties, for securing the input and output cables (at least 4, e.g. 140 mm × 3.5 mm).
- An output cable, i.e. any cable of appropriate rating and length to accommodate the application.
- A slow-reacting output fuse (63A recommended).
- If another 230 V source may be available, a transfer switch.

STEP 1: Mounting the unit

- Determine the bolt / screw positions.
- Turn the screws / bolts (Ø 6mm) into the wall but do not tighten them entirely.
- Place the housing over the screws / bolts.
- Fix the housing by fastening the screws securely.

STEP 2: Connecting the genverter cable

L1 L2 L3 PE PE L1 N

INPUT OUTPUT







- The genverter cable (e.g. 4 × 6 mm²) shall be installed using short-circuit proof clamps.
- Remove the cover protecting the terminals by unscrewing the two tapping screws. Provide the genverter cable wires with lugs and connect the wires to the input terminals as follows:
 - brown to L1,
 - black to L2,
 - grey to L3,
 - blue to N
 - green/yellow to PE.
- Use cable ties of sufficient strength as a strain relief.

STEP 3: Connecting the output cable

- A slow-reacting fuse (63 A recommended) should be installed to protect the installed electrical system. Two fuses are required for split phase wiring. Make sure there is a Residual Current Device between the WP-PMG and any on-board AC equipment.
- Provide the output cable wires with lugs and connect the wires to the output terminals as follows:
 - For 230V/ 50Hz output:
 - green/yellow to PE,
 - brown to L1, this is Line output
 - blue to L2, this is Neutral output; connect to PE if required
 - interconnect N with N.
 - For twin phase 120V/ 60Hz or 240V/ 60Hz split phase:
 - green/yellow or green to PE (Protective Ground)
 - black to L1
 - red to L2
 - white to N; interconnect N with N; connect to PE if required
- Use cable ties of sufficient strength as a strain relief.
- Replace the cover protecting the terminals and tighten the tapping screws.

STEP 4: Connecting the remote control panel (optional)

- The WP-PMG has a local control panel, which is on the unit, and a remote control panel, the installation of which is optional.
- The remote control panel can be mounted either on or in the dashboard. When the remote control is mounted on the dashboard, the back cover can be used as a drill template.
- The connecting cable can exit in any direction through one of the pre-shaped ports in the sides of the plastic case or through a hole in the dashboard. On the WP-PMG, the cable is plugged into the PMG REMOTE port. Similarly a second remote panel can be connected to the other PMG REMOTE port. In many installations, only one or two PMG REMOTE ports will be used.

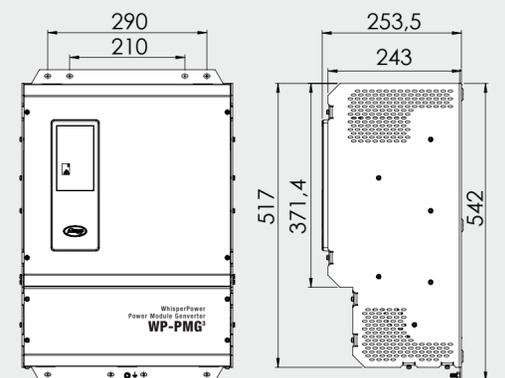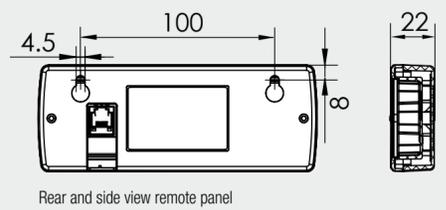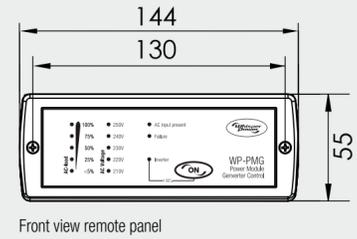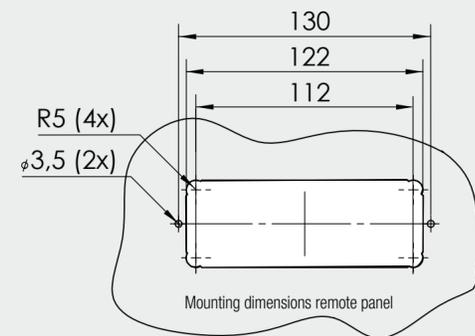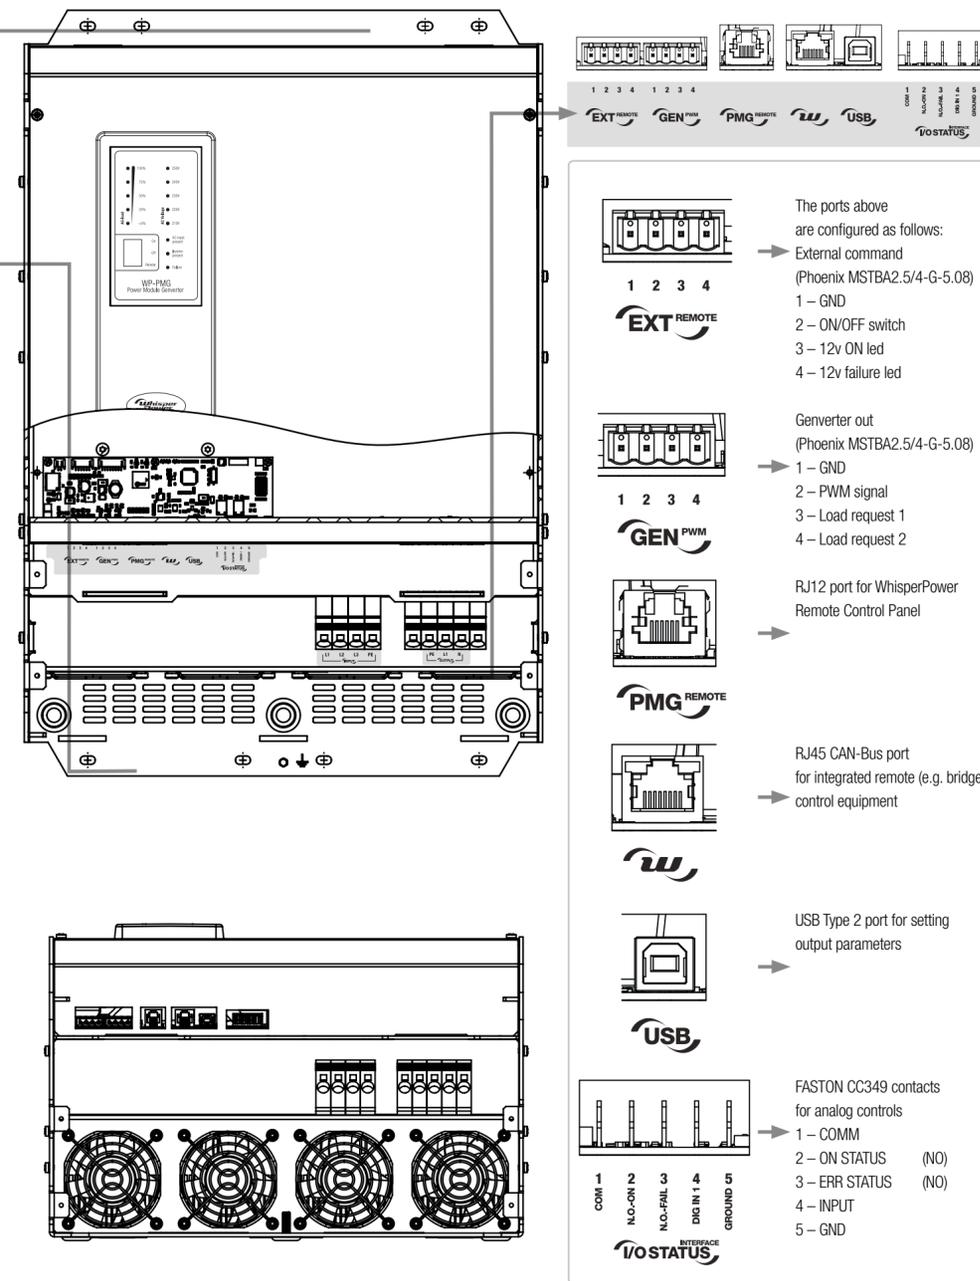

5. SPECIFICATIONS

POWER MODULE FOR GENVERTER (WP-PMG)

Article nr.

GENERAL SPECIFICATIONS	
Genverter model	M-GV 15
Nominal power	12 kW
Nominal apparent power	15 kVA
Input voltage 3*	240..400 V (AC), star connection
Input frequency	200..400 Hz
Maximum input current	32 A
Output voltage	230 V (AC)/ 240/120 V (AC)
Output frequency	50 Hz/ 60 Hz
Output current	64 A
Wire system	L1-N-PE/ L1-N-L2-PE
WEIGHT AND DIMENSIONS	
Weight	22,25 kg
Dimensions (h × w × d)	568 × 387 × 248 mm
Mounting rectangle (h × w)	478 × 340 mm
OUTPUT SPECIFICATIONS	
Output voltage (AC)	200..240 V (nominal 230 V)
Output voltage stability	+/- 5% (resistive load step 0-100%)
Voltage THD (total harmonic distortion)	< 3%
Output frequency	45..55 Hz (nominal 50 Hz)
Frequency variations	< 1%
Continuous power	12 kW
Peak power	24 kW, for 2 s
Short circuit protection	yes
Peak efficiency	97%
Nominal efficiency	95% at full load
GENERAL CONDITIONS	
Operating temperature	-20..70 °C (linear de-rating above 40 °C)
Ventilation	Forced cooling (temperature and load dependent)
Storage temperature	-40..80 °C
Relative humidity in operation/storage	up to 95% non-condensing
Ingress protection	IP23
Lifetime expectancy at 40°C and nominal load	100 000 hours
APPLICABLE STANDARDS AND EU DIRECTIVES	
EMC Directive	EMC (2004/108/EC)
Emission:	EN 55022 (Class A/B residential/light industrial use)
Harmonics:	EN 61000-3-2 (<16A, Class A)
Dips, variations, flicker:	EN 61000-4-11, EN6100-3-3
Immunity:	EN 61000-6-2, marine suitable or better • EN 60945: Maritime navigation and radio communication equipment and systems
Low Voltage Directive	LVD (2006/95/EC) EN 60950: Safety of information technology equipment
Vibration and shock levels	IEC/EN 68-2-6: Vibration (sinusoidal); 5-50 Hz velocity, max. 20 mm amplitude, suitable for marine and mobile high vibration environments

6. WARRANTY TERMS AND CONDITIONS

WhisperPower guarantees that the equipment has been built according to the legally applicable standards and specifications. WhisperPower assures the product warranty of the Power Module for Genverter during two years after purchase, on the condition that all instructions and warnings given in this manual are taken into account during installation and operation. The warranty is limited to the costs of repair and/or replacement of the product by WhisperPower only. Costs for installation labor or shipping of the defective parts are not covered by this warranty.

7. CE MANUFACTURER'S DECLARATION

We, WhisperPower BV, Kelvinlaan 82, 9207 JB Drachten, Netherlands, hereby declare that:

Product: 6030XXXX WhisperPower-Power Module Genverter

Is in conformity with the following provisions of the EC: 2004/108/EC (EMC Directive), the following harmonized standards having been applied:

EN 55022:2010 (Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement)

EN 61000-3-2:2006 (Electromagnetic compatibility [EMC] - Part 3-2: Limits - Limits for harmonic current emissions)

EN61000-6-1: 2007 (Electromagnetic compatibility [EMC]. Generic standards. Immunity for residential, commercial and light-industrial environments)

EN 61000-6-2: 2007 (Electromagnetic compatibility [EMC] - Part 6-2: Generic standards - Immunity for industrial environments)

EN 60945:2002 (Maritime navigation and radiocommunication equipment and systems)

2006/95/EC (Low Voltage Directive), the following harmonized standard having been applied:

EN 60950: 2000 (Safety of information technology equipment)

[Signature]
Drachten,
M. Favot, C.T.O. WhisperPower B.V.

